





法兰座
Flange Unit housings

表10 Table10

PFTD.FCT	J	A2
203	± 700	± 500
204	± 700	± 500
205	± 700	± 500
206	± 700	± 500
207	± 800	± 500

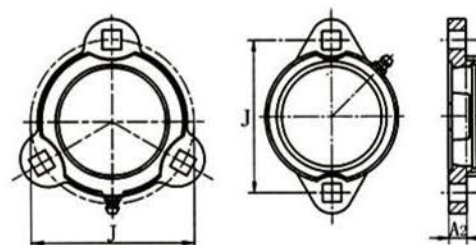

PFTD,FCT-Type

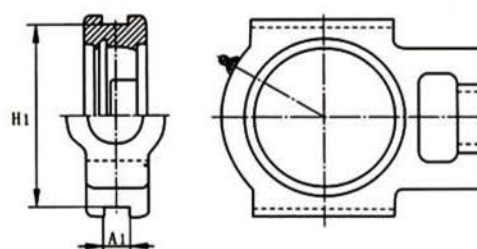

T-Type

注(Notes):

1. J-孔中心距

J-bolt holes centerline dimension.

2. A2-安装表面到轴承中心线间距离

A2-bearing centerline distance from mounting surface.

2.4 滑块座的公差

Tolerances for take-up type housings

滑块座
take-up Unit housings

表11 Table11

(μ m)

座的代号 Housings	偏差 Deviations				滑动槽平行度 Parallelism of sliding slot MAX.
	A1		H1		
NO.	上差 High	下差 Low	上差 High	下差 Low	
T204	+200	0	0	-500	500
T205	+200	0	0	-500	500
T206	+200	0	0	-500	500
T207	+200	0	0	-500	500
T208	+200	0	0	-500	500
T209	+200	0	0	-500	500
T210	+200	0	0	-500	500
T211	+300	0	0	-800	600
T212	+300	0	0	-800	600
T213	+300	0	0	-800	600
T214	+300	0	0	-800	600
T215	+300	0	0	-800	600
T216	+300	0	0	-800	600
T217	+300	0	0	-800	600
T218	+300	0	0	-800	600
	+300	0	0	-800	700
	+300	0	0	-800	700
	+300	0	0	-800	700
	+300	0	0	-800	800
	+300	0	0	-800	800
	+300	0	0	-800	800

注(Notes):

1. A1-滑动槽宽度

1. A1-Width of guide rail grooves

2. H1-滑动槽间距

2. H1-The space of guide rail grooves.