




FZB带座轴承的油嘴有A类（直油嘴），B类（45°弯头油嘴）和C类（90°弯头油嘴）三种铜制或铁制油嘴。FZB轴承的油嘴标准如表17示。可供选用的油嘴有M6X1,M8X1,M10X1,1/4-28UNF,1/8-27NPT,G1/4-19以及G1/8等，如表18示。客人可以根据实际需要指定。The grease fittings applied by FZB bearing units are classified as A type(straight),B type(type45°)and C type(type 90°)which are made of brass or steel.Grease nipple types, for FS standard bearing units are given in table 17. The availability of the grease nipple dimensions and designation to each type is M6x1,M8x1,M10x1,1/4-28UNF, 1/8-27NPT,G1/4-19 and G1/8,as given in table 18.Gustomers are free to order with the specified dimensions and designations.

FZB标准带座外球面轴承油嘴型号

Grease nipple types for FS standard bearing units

表17 Table17

座型号	油嘴类型及尺寸 Grease fitting type and dimension
201-209 305-307 X05-X08	A类, M6*1 A Type.M6*1
210-215 308-312 X09-X14	A类, M8*1 A Type.M8*1
216-218 313-328 X15-X20	A类, M10*1 A Type.M10*1

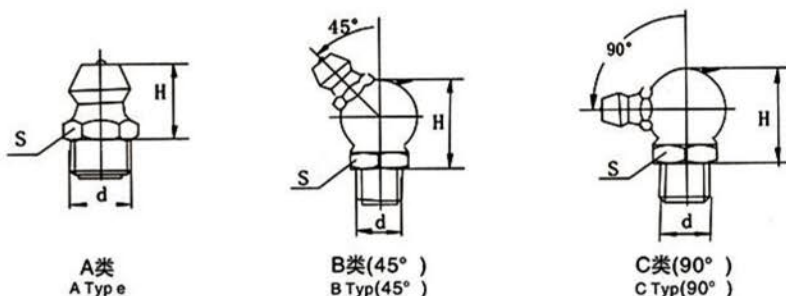

带座外球面轴承油嘴类型及尺寸表

Applicable grease fittings dimensions and designations of bearing units

表18 Table18

油嘴类型 Grease fitting Type	d	H(mm)	S(mm)
A类 A Type	M6*1	9	7
	M8*1	9	10
	M10*1	9.5	11
	1/4-28UNF	9	7
	1/8-27NPT	9.5	11
	G1/4-19	14	14
B类 B Typ45	M6*1	15	10
	M8*1	15	10
	1/4-28UNF	15	10
	1/8-27NPT	15	10
C类 C Typ90	M6*1	15	10
	M8*1	15	10
	1/4-28UNF	15	10
	1/8-27NPT	14.5	10